

Product Information

FIBDT - Underground Tunnel with 1200 x 1200mm Curved Entry Panels

BS EN 1176 - Designed to British & European Standards


MATERIALS

Panels - High Density Polyethylene (HDPE)

Ribbed Tunnel - HDPE Heavy duty ribbed tunnel with a smooth inner

SUPPLY METHOD


Tunnel - Fully assembled



Surface or below ground fixing brackets available as an additional extra.





TUV certified as freestanding only. Underground use un-certified due to varying installation methods.

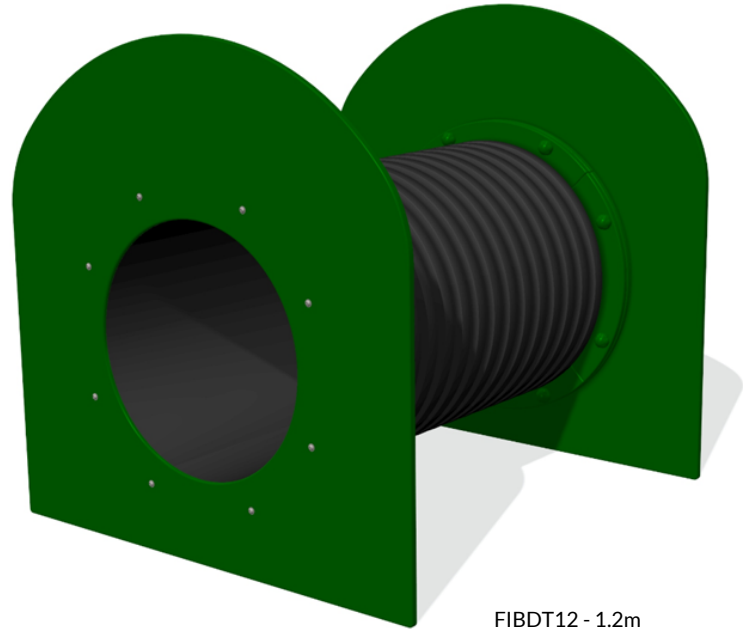

FIBDT12 - 1.2m

DIMENSIONS

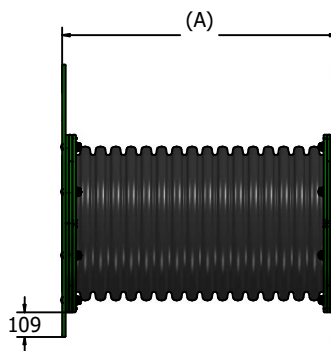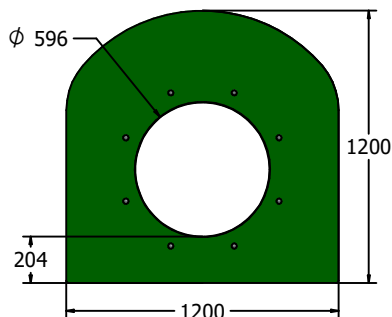

Tunnell Overall Length (all lengths +/- 20mm)	
Product Code	Length (A)
FIBDT12	1213mm +/- 20mm
FIBDT15	1482mm +/- 20mm
FIBDT18	1818mm +/- 20mm
FIBDT20	2020mm +/- 20mm

TECHNICAL

Age Range: 2+ Years
Largest Part: FIBDT12 - 1200 x 1200 x 1213mm +/- 20mm
Heaviest Part: FIBDT12 - 63kg Approx.
Total Weight: 63kg Approx.
FFH (Free Fall Height): 800mm
Surfacing: 1.5m from extremes of equipment.

Age Range: 2+ Years
Largest Part: FIBDT15 - 1200 x 1200 x 1482mm +/- 20mm
Heaviest Part: FIBDT15 - 68kg Approx.
Total Weight: 68kg Approx.
FFH (Free Fall Height): 800mm
Surfacing: 1.5m from extremes of equipment.

Age Range: 2+ Years
Largest Part: FIBDT18 - 1200 x 1200 x 1818mm +/- 20mm
Heaviest Part: FIBDT18 - 72kg Approx.
Total Weight: 72kg Approx.
FFH (Free Fall Height): 800mm
Surfacing: 1.5m from extremes of equipment.

Age Range: 2+ Years
Largest Part: FIBDT20 - 1200 x 1200 x 2020mm +/- 20mm
Heaviest Part: FIBDT20 - 75kg Approx.
Total Weight: 75kg Approx.
FFH (Free Fall Height): 800mm
Surfacing: 1.5m from extremes of equipment.

IMPORTANT: you must specify the colour option you require at the time of order if it is different from the colour listed/shown above, requirements are subject to availability at the time of order